


SUPER HAND DRY CUTTER 8320

THE BIGGEST



ECO-FRIENDLY
with Dry Cutting-Technology

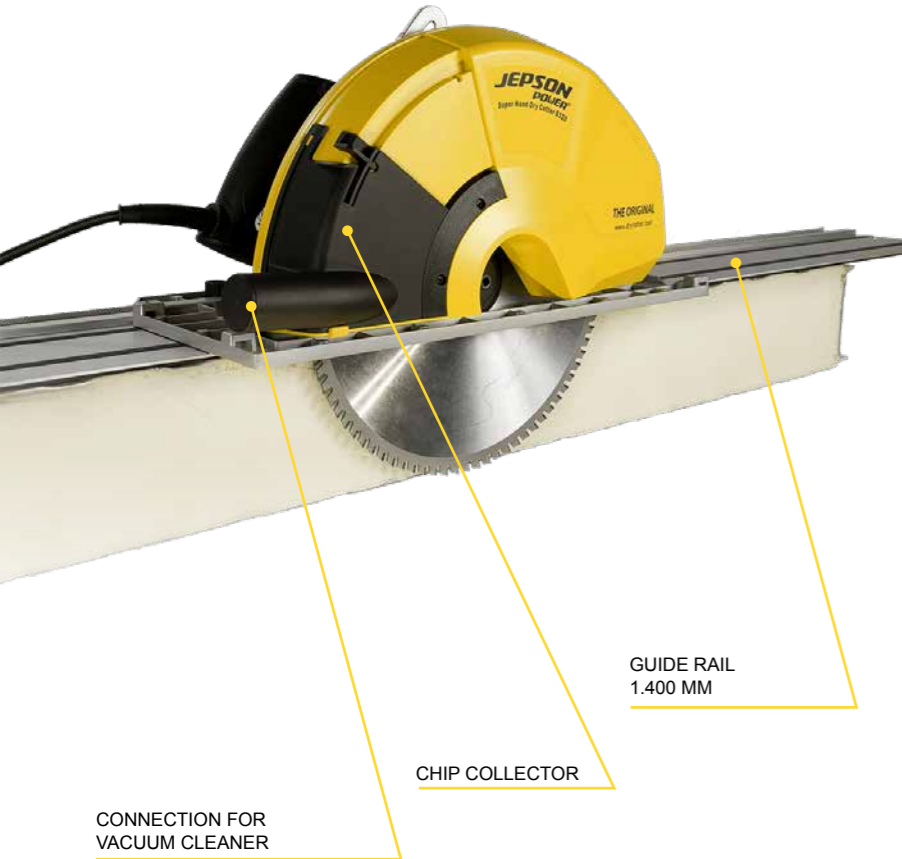

Metal cutting circular saw by Jepson Power for fast and low-burr cutting of sandwich panels and trapezoidal sheets without cooling

- Ideal for cutting sandwich panels, trapezoidal sheet, trunking and cable ducting, steel pipes and nonferrous metals, composite materials etc., up to a cutting depth of 120 mm on guide rail
- Dry cutting without lubricant
- Closed construction of the blade guard prevents flying chips to the user
- Integrated chip collector, connector for optional extraction device
- LED overload indicator: green: ok. flashing red: warning | red: over load
- Lightweight magnesium: 8,4 kg (without saw blade)
- Ideal for clean and straight cutting of sandwich panels
- Optional: Guide rail 1.400 mm delivered with 2 C-clamps

Scope of delivery:
Ø 320 / 84T CT saw blade for sandwich panels & steel




Optional:
Transport case with wheels
Ref. 60827Box




Examples of cuts



Quick fixation



Depth adjustment with scaling



Connector for connecting 2 guide rails
Ref. 608275B





Power input	Voltage	No load speed	Net weight	Blade size	Bore	Cable length
1.800 W	230V/50Hz or 115V/60HZ	1.700 min ⁻¹	8,4 kg	Ø 320 mm	Ø 25,4	5 m

Super Hand Dry Cutter 8320	Reference
with Ø 320/84T CT saw blade (230V)	608270
with Ø 320/84T CT saw blade (115V)	608270 U
with Ø 320/84T CT saw blade + with guide rail 1.400 mm incl. 2 quick release clamps (230V)	608270SET

Max. cutting capacities (on guide rail)	
	90°
Round	120 x 6 mm
Square	120 x 120 x 6 mm
Rectangular	120 x 120 x 6 mm


ACCESSORIES (OPTIONAL)

Selecting the correct number of teeth depends on the wall/diameter of the material. We will be happy to advise you. +49 (0) 2403 64 55 0

Carbide tipped saw blades	Ø [mm]	Teeth	Bore [mm]	Kerf [mm]	Max. Speed	Reference
Sandwich panels & steel	320	84	25,4	2,2	1.800 min ⁻¹	608276 
Steel (thick-walled)	320	72	25,4	2,2	1.800 min ⁻¹	608278 
Aluminum	320	72	25,4	2,2	1.800 min ⁻¹	608278A 
Stainless steel NSF Coated	320	84	25,4	2,2	1.800 min ⁻¹	608276NSF 




Guide rail SET
Length 1.400 mm
Quick release clamps 2 pcs
Ref. 608275SET



Guide rail
Length 1.400 mm
Ref. 608275D



Heavy duty professional blow carry case
Ref. 60827Box



Connector for guide rail
Ref. 608275B



Quick release clamp for guide rail (2 pcs.)
Ref. 608275S