

HAND DRY CUTTER 8203E

67 mm cutting depth

Ideal for cutting metal sheets,
gratings and steel profiles.

Dry Cutting-Technology 

CAS - Battery System 

Made in Germany 



€ 998,00
excl. VAT



**INCL. Ø 203/48T SAW BLADE FOR
STEEL, 2 HIGH PERFORMANCE
18V LIHD 5,5A BATTERIES,
AIR-COOLED LIHD HIGH SPEED
CHARGER AND CASE
REF. 608295E**

Voltage	No load speed	Net weight	Blade size	Bore
18V	3500 min ⁻¹	5,4 kg	Ø 203 mm	Ø 25,4

Hand Dry Cutter 8203E	Reference	Price excl. VAT
Incl. Ø 203/48T „LBS impact resistant“ saw blade for steel, 2 high performance 18V LiHD 5,5A batteries, Air-cooled LiHD high speed loading station 230V & carry case	608295E	998,00

Saw blades	Reference	Price excl. VAT
Ø 203/48T carbide tipped saw blade LBS impact resistant	72220348	104,00
Ø 203/54T carbide tipped saw blade for stainless steel	72120354I	113,00

Accessories	Reference	Price excl. VAT
High performance 18V LiHD 5,5A battery	608295EB	149,00
Air-cooled LiHD high speed loading station 110V	608295EC1	104,00
Air-cooled LiHD high speed loading station 230V	608295EC2	104,00
Guide rail 1.400 mm + 2 C-clamps	608275SET	168,00



Jepson Power GmbH
Ernst-Abbe-Str. 5
52249 Eschweiler
Deutschland

Phone
E-Mail
Website

+49 2403 64 55 0
info@jepson.de
www.drycutter.com

© JEPSON Power GmbH - Changes, printing errors and omissions excepted.
2024 - Prices in €, excl. VAT

ECO-FRIENDLY
Dry Cutting-Technology



€ 1318,00

excl. VAT

**SUPER HAND DRY CUTTER 8320
INCL. 320/84T SAW BLADE
& GUIDE RAIL SET
REF. 608270SET**

Ideal for cutting sandwich panels, steel, trapezoidal sheet, trunking and cable ducting, steel pipes and -profiles, nonferrous metals, composite materials etc. up to a cutting depth of 120 mm (4 ¾") on cutting guide rail.





SUPER HAND DRY CUTTER 8320 THE BIGGEST



€ 1150,00

excl. VAT

**SUPER HAND DRY CUTTER 8320
INCL. 320/84T SAW BLADE
REF. 608270**



Cutting depth
120mm

Technical specifications

Power input	1.800 W
Voltage	230V / 50Hz
No load speed	1.700 min ⁻¹
Net weight	8,4 kg
Blade size	320 mm
Bore	25,4 mm
Cable length	5 m

Max. cutting capacities

	90°
Round	120 x 6 mm
Square	120 x 120 x 6 mm
Rectangular	120 x 120 x 6 mm

Super Hand Dry Cutter 8320	Reference	Price excl. VAT
with Ø 320/84T saw blade	608270	1150,00
with Ø 320/84T saw blade & guide rail 1.400 mm with 2 quick release clamps	608270SET	1318,00

Saw blades	Reference	Price excl. VAT
Ø 320/84T for sandwich panels and steel	608276	209,00
Ø 320/72T for thick walled material	608278	188,00
Ø 320/84T steel and stainless steel - coated food and construction	608276NSF	282,00

Accessories	Reference	Price excl. VAT
Cutting guide rail 1.400 mm	608275D	104,00
Cutting guide rail 1.400 mm incl. 2 quick release clamps	608275SET	168,00
Heavy duty professional blow case	60827Box	299,00
Connector for guide rails	608275B	16,00



GUIDE RAIL 1.400 MM FOR ALL JEPSON POWER CIRCULAR SAWS



Quick-Release-Clamp



With adapter 608275A:
Compatible with ALL handheld
Jepson Power circular saws




**Compatible with SHDC 8320
and SHDC 8320AIR**

With the new adapter 608295A our top selling guide rail is now compatible with the whole range of handheld metal cutting circular saws.

- Ideal for clean and straight cutting of sandwich panels, sheet metal and metal gratings.
- Tool-free fixation of the materials to be sawn
- Safe and tilt-free guidance of the saw blade through the material

The rail reduces the machines cutting depth by 2 mm. Bevel cut only without rail.

Optional connector for connecting multiple guide rails.



For SHDC 8320	Reference	Price excl. VAT
Guide rail set 1.400 mm incl. 2 quick release clamps	608275SET	168,00
Guide rail 1.400 mm	608275D	104,00
Connector for guide rail	608275B	16,00
Quick release clamp for guide rail (2 pcs.)	608275S	103,00

For all Jepson Power handheld circular saws	Reference	Price excl. VAT
Guide rail set 1.400 mm incl. 2 quick release clamps and adapter	608275ASET	189,00
Adapter for all Jepson Power handheld circular saws	608275A	21,00
Connector for guide rail	608275B	16,00
Quick release clamp for guide rail (2 pcs.)	608275S	103,00



€ 499,00
excl. VAT

**ADJUSTABLE GUIDE RAIL WITH
INTEGRATED CLAMPING SYSTEM
REF. 608270ASET**

Adjustable guide rail: Ideal for the clean and straight cut of trapezoidal sheets, metal grids, sandwich panels, multiple metal profiles and tubes and many other materials.


- Quick and easy setting of the desired clamping range (600 - 1.200 mm)
- Tool-free fixation of the materials to be sawn
- Safe and tilt-free guidance of the saw blade through the material

The Hand Dry Cutter 8230N achieves the best results with the impact-resistant LBS saw blade (cutting width only 1.4 mm). Cutting depth: 80 mm with rail - 82 mm without rail. Bevel cut only without rail.

Description	Reference	Price excl. VAT
Adjustable guide rail with integrated clamping system for Hand Dry Cutter 8230N	608284	499,00



Materials



**Ideal for cutting metal grids
with LBS saw blade**



Tool-free fixation



Clamping example



HAND DRY CUTTER 8230N

THE AGILE

Max. cutting depth of
82/56mm 90°/45°



€ 629,00

excl. VAT

WITH Ø 230/48T INOX
SAW BLADE REF. 608280I

Technische Daten		Maximaler Arbeitsraum in mm	
Power input	1.700 W	90°	45° (bevel cut)
Voltage	230V / 50Hz of 115V / 60Hz	Round	82 x 6 56 x 6
No load speed	2.600 min ⁻¹	Square	82 x 82 x 6 56 x 56 x 4
Net weight	7,1 kg	Angle	82 x 82 x 6 56 x 56 x 4
Blade size	Ø 230 mm	Plane	10 8
Bore	Ø 25,4	Cutting depth	82 56
Cable length	5 m		

Hand Dry Cutter 8230N + case	Reference	Price excl. VAT
with 230/48T Inox saw blade 230V	608280I	629,00
with 230/48T Inox saw blade 115V	608280IUS	629,00
with 230/48T Inox saw blade 230V + adjustable guide rail integrated clamping system only 90° cut	608280ICG	1128,00

Saw blades	Reference	Price excl. VAT
230/48T steel	72123048	98,00
230/48T steel and stainless steel	72123048I	104,00
230/48T stainless steel - coated Food & Construction	72123048NSF	171,00
230/60T - aluminum	72123060	107,00
230/68T- thin walled material	72123068	118,00
230/84T - thin sheets	72123084	140,00
230/60T - LBS metal grids	72223060	104,00

Accessories	Reference	Price excl. VAT
Cutting guide rail with integrated clamping system (600 - 1200 mm)	608284	499,00



PSDC 9435 THE BESTSELLER

€ 940,00

excl. VAT

**WITH 355/90T
SAW BLADE REF. 600560T3**

two Patented stabilizers for a better
cutting surface and long cutting life

Technical Data		Max. cutting capacities		
			90°	45°
Power input	2.400 W			
Voltage	230V / 50Hz 115V / 60Hz	Round	140/inox 125 mm	102 mm
No load speed	1.400 min ⁻¹	Square	125 x 125 mm	80 x 80 mm
Net weight	25 kg	Rectangular	105 x 155 mm	75 x 100 mm
Blade size	Ø 355 mm			
Bore	Ø 25,4			

Premium Super Dry Cutter 9435	Reference	Price excl. VAT
with 355/90T saw blade 230V	600560T3	940,00
with 355/90T saw blade 115V	600560UST3	940,00

Saw blades	Reference	Price excl. VAT
355/90T for stainless steel - coated Food & Construction	600570NSF	293,00
355/120T for very thin steel and stainless steel	600512I	293,00
355/90T for thin steel and stainless steel	600570	219,00
355/72T for medium steel and stainless steel	600580	199,00
355/60T for thick steel and stainless steel	600590	179,00
355/60T for cast iron	600591	179,00
355/66T for unalloyed steel	600595	190,00
355/96T for aluminum	600594	170,00

Accessories	Reference	Price excl. VAT
Stand for PSDC 9435	600526T3	340,00
Eccentric clamping system	609910	156,00
Thinfix - Clamping system for open profiles	600546	93,00



For small series production at 90 °:

- 3 m feed roller & measuring track for plastic, aluminum & steel profiles
- 3 m discharge roller and measuring track for plastic, aluminum and steel profiles
- Track width 390 mm, conveyor roller width 300 mm
- Support roller pitch ~ 290 mm
- Load capacity per meter of roller conveyor ~ 100 kg
- Track height adjustable from 760 - 1.100 mm



ON REQUEST

ANALOG REF. 609960A
DIGITAL REF. 609960 B

Description	Reference	Price excl. VAT
Production unit - analog incl. material supply and discharge track 3m *and Premium Super Drycutter 9435 and saw blade 90T	609960A	on request
Production unit - digital incl. material supply and discharge track 3m * and Premium Super Dry Cutter 9435 & saw blade 90T	609960B	on request
Additional material feed and discharge track 3 m*	609960	on request
Quick clamping system for series cuts with the same diameter or size	1501128	150,00
Eccentric clamping system	609910	156,00
Thinfix - Clamping system for open profiles	600546	93,00
*Special sizes		*on request

Saw blades	Reference	Price excl. VAT
355/90T for stainless steel - coated Food & Construction	600570NSF	293,00
355/120T for very thin steel and stainless steel	600512I	293,00
355/90T for thin steel and stainless steel	600570	219,00
355/72T for medium steel and stainless steel	600580	199,00
355/60T for thick steel and stainless steel	600590	179,00
355/60T for cast iron	600591	179,00
355/66T for unalloyed steel	600595	190,00
355/96T for aluminum	600594	170,00



HAND DRY CUTTER 8203

THE COMPACT



€ 545,00

excl. VAT

**WITH SAWBLADE
Ø 203/42T REF. 608295**

Technical Data		Max. cutting capacities		
			90°	45° (bevel cut)
Power input	1.700 W			
Voltage	230V / 50 Hz	Round	67 x 6	42 x 4
No load speed	3.700 min ⁻¹	Square	67 x 67 x 6	42 x 42 x 4
Net weight	6,3 kg	Angle	67 x 6	42 x 4
Blade size	Ø 203 mm	Plan	10	8
Bore	Ø 25,4	Cutting depth	67	42
Cable length	5 m			

Hand Dry Cutter 8203		Reference	Price excl. VAT
with 203/42T for steel + stainless steel (Inox)		608295	545,00
with 203/48T LBS saw blade impact-resistant		608295LBS	558,00
Saw blades		Reference	Price excl. VAT
203/42T for steel + stainless steel		72120342I	91,00
200/48T for aluminum		72120348A	101,00
200/70T for thin-walled material/corrugated sheets		72120070	135,00
203/48T LBS - shock resistant		72220348	102,00



PREMIUM DRY CUTTER 9430

THE ORIGINAL

€ 786,00

excl. VAT

WITH SAWBLADE
Ø 305/60T REF. 600520T3



Technical Data		Max. cutting capacities		
Power input	2.200 W		90°	45°
Voltage	230V / 50Hz	Round	115	85
No speed load	1.400 min ⁻¹	Square	100 x 100	85 x 85
Net weight	23 kg	Rectangular	85 x 160	85 x 85
Blade size	Ø 305 mm			
Bore	Ø 25,4			

Premium Dry Cutter 9430	Reference	Price excl. VAT
with 305/60T saw blade 230V	600520T3	786,00

Saw blades	Reference	Price excl. VAT
305/60T for steel, non-ferrous metals and composites	600530	141,00
305/60T for steel & stainless steel	600530 40	170,00
305/60T cast iron	600535	141,00
305/80T for thin tubes and profiles	600540	174,00

Accessories	Reference	Price excl. VAT
Stand for PSDC 9435	600526T3	340,00
Eccentric clamping system	609910	156,00
Thinfix - Clamping system for open profiles	600546	93,00



DRY MITER CUTTER 9410 ND

THE VERSATILE



€ 880,00

excl. VAT

WITH SAWBLADE
Ø 255/60T REF. 600651

Technical Data		Max. cutting capacities	
Power input	1.500 W	90°	45°
Voltage	230V / 50Hz 115V / 60Hz	Round	70 x 4 60 x 4
No load speed	1.600 min ⁻¹	Square	70 x 70 x 4 60 x 60 x 4
Net weight	19 kg	Rectangular	100 x 70 x 4 60 x 60 x 4
Blade size	Ø 255		
Bore	Ø 25,4		

Dry Miter Cutter 9410 ND	Reference	Price excl. VAT
with 255/60T saw blade and fixation set „K“ for tubes Ø 30 up to 70 mm 230V	600651	880,00
with 255/60T saw blade and fixation set „K“ for tubes Ø 30 up to 70 mm 115V	600651US	880,00

Saw blades	Reference	Price excl. VAT
Ø 255/66T steel and stainless steel - coated food and construction	600654NSF	237,00
Ø 255/60T - mild steel	600598	117,00
Ø 255/66T - thin steel	600654	164,00
Ø 255/80T - aluminum	600655A	135,00
Ø 255/66T - LBS metal grids	72225566	155,00

Accessories	Reference	Price excl. VAT
Fixation set „K“ for tubes Ø 30 mm up to 70 mm	600653	26,00



SUPER HAND DRY CUTTER 8320 AIR

AIR OPERATED



Technical Data	
Operating pressure	6 bar
Motor output	1.800 W
No load speed	1.200 min ⁻¹
Bore	Ø 25,4
Air consumption	ca. 2m ³ /min
Air connection	R ½"
ID of hose	min. Ø 16 mm
Net weight	11 kg
Blade size	320 mm
Noise level (1m distance)	95 dB (A)
Vibration level no load speed	<2,5 m/s ²



On request

WITH SAW BLADE
Ø 320/84T AND CARRY CASE
REF. 608200

Super Hand Dry Cutter 8320 Air + carry case	Reference	Price excl. VAT
With Ø 320/84T saw blades	608200	on request



HAND DRY CUTTER 8230 AIR

AIR OPERATED



Technical Data	
Operating pressure	6 bar
Bore	1.500 W
Motor output	1.200 min ⁻¹
No speed load	Ø 25,4
Air consumption	ca. 2m ³ /min
Air connection	R ½"
ID of hose	min. Ø 13 mm
Net weight	8,6 kg
Blade size	230 mm
Noise level (1m distance)	103,3 dB (A)
Vibration level no load speed	<2,5 m/s ²



On request

WITH SAW BLADE
Ø 230/48T AND CARRY CASE
REF. 608100

Hand Dry Cutter 8230 AIR + carry case	Reference	Price excl. VAT
With Ø 230/48T standard saw blade + carry case	608100	on request
With Ø 230/60T LBS saw blade + carry case	608100LBS	on request



PIPE DRY CUTTING MACHINE

180 AIR

MADE
IN
GERMANY



Technical Data

Power input	2.400 W
Operating pressure	6 bar
Cutting depth	50,0 mm
Shank	22,2/30,0 mm
Air consumption	3,0 m ³ /min
No load speed	1.800 min ⁻¹
Height	250 mm
Air connection	R 3/3" intérieur
Noise level	98,0 dB (A)
Vibration level no load speed	<2,5 m/s ²
Saw blades	Ø 160 - 200 mm
Nettogewicht	12,5 kg



On request

WITH SAW BLADE
Ø 180/36T REF. 608300

PDCM 180 Air	Reference	Price excl. VAT
Pneumatic unit with sawblade without accessories	608300	On request
Saw blades	Reference	Price excl. VAT
Ø 180/48T saw blade	72118048S	83,00
Ø 180/48T for steel and stainless steel	72118048YS	109,00
Ø 160/32T for steel (Ø ≤ 300)	72016032	67,00

Reference	Description	Ø pipe in mm -> necessary parts			
		400	800	1200	1600
608300	Pneumatic air drive unit with saw blade Ø180/36T	1	1	1	1
608302	Guide carriage - small	1	1	1	2
608303	Chain tensioner - small	1	1	1	2
608304	Guide chain with tightener for pipes ≤ DN 400 mm	1			
608305	Tool kit	1	1	1	1
608306	Guide carriage - large		1	2	2
608307	Chain tensioner - large		1	2	2
608308	Tension chain		1	1	2
608309	Guide chain with tightener for pipes ≤ DN 800 mm		1		
608310	Guide chain with tightener for pipes ≤ DN 1200 mm		1	1	
60827BOX	Carry case	1			
608311	Steel transport box		1	1	1
608312	Feeding pipe	1		1	1
608313	Guide chain with tightener for pipes ≤ DN 1600 mm		1		
608314	Maintenance unit with protective housing R 3/3	*x	*x	*x	*x
608315	Water tank 10L	*x	*x	*x	*x

*x = optional



ECO-Friendly

Our dry cutting technology eliminates the need for lubricants. Sawing with our saw blades is therefore particularly environmentally friendly.



Our carbide-tipped saw blades saw quickly, burr free and without cooling:

- Steel
- Non-ferrous metals
- Plastic
- Composites
- Stainless steel

Universally applicable on hand-held circular saws, miter saws and stationary machines

- Very high durability
- Excellent cutting quality
- Short cutting times
- Thin-walled
- Noise reduced thanks to laser slots filled with synthetic resin
- Can be resharpened up to 5 times

Ø mm	Bore	Kerf	Teeth	Application	Reference	Price excl. VAT
137	20	1,50	30	stainless steel	72113730I	63,00
150	20	1,50	42	stainless steel	72115042I	68,00
160	30*	1,80	32	steel	72016032	67,00
165	20	1,70	48	stainless steel	72116548I	73,00
180	20	1,60	48	steel	72118048S	87,00
180	20	2,00	48	steel & stainless steel	72118048YS	109,00
192	20	1,85	48	steel (thin wall)	719248	88,00
192	20	1,85	48	aluminium	719248A	80,00
192	20	1,85	70	metal sheets	719270	128,00
200	30*	1,90	40	steel	72020040	85,00
200	30*	1,90	60	steel (thin wall)	72020060	102,00
203	25,4	1,90	42	stainless steel	72120342I	91,00
203	25,4	1,90	48	aluminium	72120048A	101,00
203	25,4	1,90	70	steel (thin wall)	72120070	135,00
210	30*	2,00	42	steel	72021042	88,00
210	30*	2,00	64	steel (thin wall)	72021064	111,00
230	30*	2,00	48	steel	72023048	101,00
230	30*	2,00	60	aluminium	72023060	112,00
230	30*	2,00	68	steel (thin wall)	72023068	122,00

***Reducing rings included (30/25, 30/20, 30/16)**



Technical data

Saw blade diameter	137 - 355 mm
Max. rotational speed	1.800 - 4.200 rpm
Cutting width	1,50 - 2,20 mm
Pin holes	Customized

Ø mm	Bore	Kerf	Teeth	Application	Reference	Price excl. VAT
230	25,4	2,00	48	steel	72123048	98,00
230	25,4	2,00	48	steel & stainless steel	72123048I	104,00
230	25,4	2,00	60	aluminium	72123060	107,00
230	25,4	2,00	68	steel (thin wall)	72123068	118,00
230	25,4	2,00	84	steel (thin wall)	72123084	140,00
255	25,4	2,00	60	steel	600598	117,00
255	25,4	2,00	66	steel (thin wall)	600654	164,00
255	25,4	2,20	80	aluminium	600655A	135,00
305	25,4	2,20	60	steel	600530	141,00
305	25,4	2,20	60	steel	600530 40	170,00
305	25,4	2,20	60	cast iron	600535	141,00
305	25,4	2,20	80	steel (thin wall)	600540	174,00
320	25,4	2,20	84	steel	608276	209,00
320	25,4	2,20	72	steel (thick wall)	608278	188,00
355	25,4	2,20	120	steel & stainless steel	600512I	293,00
355	25,4	2,20	90	steel & stainless steel	600570	219,00
355	25,4	2,20	72	steel & stainless steel	600580	199,00
355	25,4	2,20	60	steel & stainless steel	600590	179,00
355	25,4	2,20	60	metal sheets	600591	179,00
355	25,4	2,20	66	steel	600595	190,00
355	25,4	3,40	96	aluminium	600594	170,00

CARBIDE TIPPED SAW BLADES FOR METAL




FOR CORDLESS TOOLS



The brand names used by the respective companies are subject to general trademark, trademark or patent protection.

Universal use also on all conventional cordless tools! Max RPM is printed on sawblades!

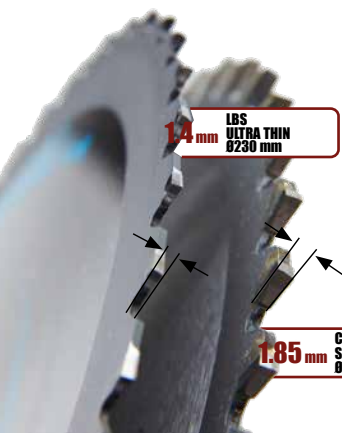

HILTI

Makita

Panasonic

HiKOKI
HIGH PERFORMANCE POWER TOOLS

BOSCH

Milwaukee

DEWALT

metabo
PROFESSIONAL POWER TOOL SOLUTIONS

AEG



LBS IMPACT RESISTENT SAW BLADES FOR METAL

ULTRA THIN

Ideal for cutting metal grids and grates, trapezoidal sheets, metal profiles, conduits, shutter pipes, ...

With 1.0 to 1.5 mm LBS-blades are much thinner than conventional saw blades. Therefore cutting with LBS-saw blades saves material and time



Ø mm	Kerf	Blade width	Bore	Teeth	For machine	Reference	Price excl. VAT
137	1,0	0,8	20	30	Bosch, Makita, Milwaukee, etc.	72213730	63,00
150	1,2	0,94	20	34	Milwaukee, Makita, etc.	72215034	68,00
165	1,2	0,94	20	40	Metabo, Milwaukee, Hikoki, Hilti	72216540	73,00
165	1,2	0,94	16	40	Metabo, Milwaukee, Hikoki, Hilti	72216540M	73,00
180	1,2	0,94	20	48	Flex, Hitachi, Makita, Rexon, Hilti etc.	72218048	96,00
184	1,2	0,94	16	48	Bosch, Dewalt, Milwaukee, Makita,	72218448	97,00
192	1,2	0,94	20	48	Jepson Power HDC 8219	72219248	99,00
203	1,2	0,94	25,4	48	AEG, Bosch, Jepson Power	72220348	104,00
230	1,4	1,2	25,4	60	Jepson Power HDC 8230N	72223060	104,00
255	1,5	1,2	25,4	66	Jepson Power DMC 9410ND	72225566	164,00



FOR STAINLESS STEEL IDEAL FOR CORDLESS TOOLS

Advantages:

- Clean cut
- Less flying sparks
- Very high durability
- No tarnishing of the material
- Low friction
- Material-saving, efficient and fast
- Environmentally friendly, without coolant
- Longer battery performance through innovative teeth

Ø mm	Kerf	Blade width	Bore	Teeth	For machine	Reference	Price excl. VAT
137	1,5	1,3	20	30	Bosch, Makita, Milwaukee, etc.	72213730	63,00
150	1,5	1,3	20	42	Milwaukee, Makita, etc.	72215034	68,00
165	1,7	1,4	20	48	Milwaukee, Makita, Hikoki, Hilti	72216540	73,00
203	1,7	1,4	20	54	AEG, Bosch, Jepson Power	72216540M	113,00



NSF-SPECIAL COATED SAW BLADES FOR STAINLESS STEEL

THE COATING OF NSF-SAW BLADE

The NSF saw blades are processed with an aluminum-titanium-chromium nitride layer, so that they are also ideally suited for special applications when machining materials that tend to stick together. The silver-colored layer is characterized by high hardness and resistance to oxidation. In addition, the NSF saw blade is designed to minimize the tendency to adhesion when processing stainless steel.

The NSF saw blades are suitable for stainless steels in the food and construction sectors.



Technical data	
Material	Aluminium titanium chromium nitride, AlTiCrN (Stacked)
Microhardheid HV 0,05	3.000 +/- 30
Coefficient of friction against steel 100Cr6	0,4
Maximale operating temperature	800° C / 1.470°F
Thickness	2 - 4 µm

Beschichtete Sägeblätter Sortiment (Sonderabmessungen auf Anfrage)

Ø mm	Bore	Kerf	Teeth	Reference	Price excl. VAT
230	25,4	2,00	48	72123048NSF	171,00
255	25,4	2,00	66	600654NSF	237,00
320	25,4	2,20	84	608276NSF	282,00
355	25,4*	2,20	90	600570NSF	293,00

*with pin bore (4/11/TK 55 mm)



OUR EXCLUSIVE
RANGE OF METAL CUTTING
SAW BLADES

SAWBLADES FOR INDUSTRIAL USE

DRYTECH® carbide or cermet tipped saw blades are suitable for high speed stationary semi-automatic and fully automatic cutting units.

- steel
- stainless steel
- plastics
- compound materials
- other non-ferrous metals

- Shortest cycle times due to high cutting speed
- Material saving through thin cut technology with wall thickness starting from 0.5 mm
- Very high durability
- Excellent cutting quality
- Up to 5 times resharpenable
- Low set-up costs
- Cost-effective


Ø mm	Bore [mm]	Cutting width [mm]	Teeth	Reference	Price excl. VAT
405	25,4	2,5	80	4050800002	on request
405	25,4	2,5	102	4051021003	on request
455	50,0	3,4	100	4551000002	on request
455	50,0	3,4	120	4551201003	on request
560	50,0	3,6	120	5601200002	on request
560	50,0	3,6	132	5601321003	on request
560	50,0	3,6	180	5601801004	on request
630	60,0	4,0	140	6301400002	on request
630	60,0	4,0	150	6301501003	on request
630	60,0	3,6	210	6302100003	on request
730	60,0	3,9	210	7302100002	on request

*Special sizes on request

Technical data	
Saw blade diameter	405 - 630 mm
Cutting capacity	Ø 6 - 240 mm
Max. rotational speed	1.800 m/min
Max. saw blade feed	6.000 mm/min
Cutting width	2,5 - 4,0 mm
Centre bore	Customized
Pin bore	Customized



VISIT US ONLINE AT
WWW.DRYCUTTER.COM

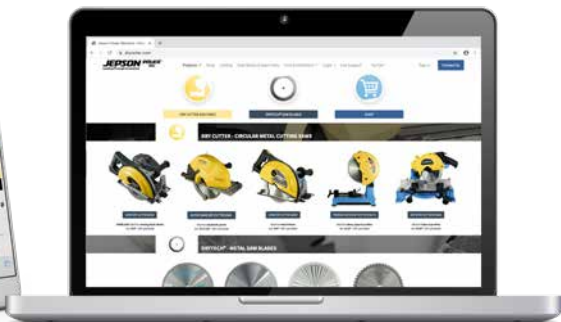

DRYCUTTER - METALLKREISSÄGEN



HAND DRY CUTTER 620E



SUPER HAND DRY CUTTER 620E



HAND DRY CUTTER 620N



PREMIUM SUPER DRY CUTTER 640E



DRYTECH® - SÄGEBLÄTTER



HARTMETALL-RESISTENTE SÄGEBLÄTTER



LASER-IMPACT RESISTANT



SOFT- SPECIAL RESISTANT



INDEX SÄGEBLÄTTER (157 x 66 mm)



MAGPRO - MAGNETBOHRMASCHINEN



MAGPRO 40 15 Adjust Model



MAGPRO 40 25



MAGPRO 50 25



MAGPRO 50 25 Adjust



SPEZIALMASCHINEN

Jepson Power
on Instagram





LSBM127 ELECTRIC HOLE CUTTING DRILL

€ 1239,00

excl. VAT

FOR PIPES Ø 32 - 203 mm
SUPPLIED IN CARRY CASE WITH
16 MM TOOL HOLDER
REF. 490060



- Ideal for quickly drilling holes up to Ø 127 mm in tubes with Ø 32 - 203 mm, with an optional chain set also suitable for tubes up to Ø 600 mm
- Built-in bubble level for an easy alignment of the drill
- The tool free quick-release handle can be mounted on either side
- Overload protection

Technical data	
Power input	1.100 W
Voltage	230V / 50Hz
No load speed	130 min ⁻¹
Drill chuck capacity	1 - 16 mm
Max. cutting capacity	Ø 127 mm
Pipe clamping capacity	Ø 32 -203 mm, optional 32 - 600 mm
Insulation class	1 Schutzleiter
Net weight	14,5 kg
Dimensions	319 x 270 x 302 mm
Cable length	2,5 m

Description	Reference	Price excl. VAT
Electric hole cutting drill for pipes Ø 32 - 203 mm Delivery in a carry case with drill chuck adapter 16 mm, crank handle set and maintenance tool	490060	1239,00
Accessories (optional)	Reference	Price excl. VAT
Long chain set for pipes Ø 32 - 600 mm	490061	411,00



GSM PRO M18 ELECTRIC TAPPER

€ 729,00


excl. VAT

**WITH SAFETY COUPLING, SIDE
HANDLE, DEPTH STOP AND
ACCESSORIES REF. 495090**

The M18 tapper makes it convenient and easy to tap a series of holes quickly. The special gear box design gives the operator precise control:

- The tool will not move without pressure on the spindle
- By pressing the spindle, clockwise rotation is activated at low speed (280 min⁻¹)
- Pulling the spindle activates counterclockwise rotation at a higher speed (680 min⁻¹)

The motor was specially developed for this task, with high torque, low speed and high concentricity. This allows the user a controllable power call and makes the M18 the ideal tool for thread cutting in just one work step. The universal holder for standard thread cutters (M6-M18) reliably prevents possible material breakages in the tool used. The ergonomic handle helps the operator to keep the tap straight. The machine has an additional side handle to counteract the leverage. Equipped with a depth stop for tapping in blind holes.

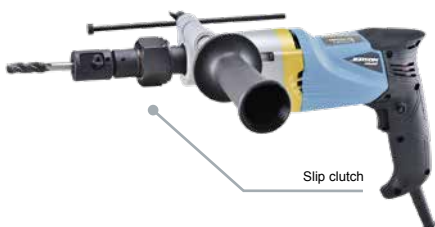

Slip clutch

Technical data		
Power input	450 W	
Voltage	230V / 50Hz	
No load speed	rechts: 280 min ⁻¹ links: 680 min ⁻¹	
Tapping range	M6 - M18	
Max. tapping capacity	in Stahl: 18 mm, in Aluminium: 16 mm	
Insulation class	1 Schutzleiter	
Net weight	3,15 kg	
Dimensions	400 x 80 x 200 mm	
Cable length	3 m	
Description	Reference	Price excl. VAT
Delivery in a carry case with safety clutch, side handle, depth stop and maintenance tool	495090	729,00



ELECTRIC BEVELER 30° / 45° DEBURRING MACHINE



€ 599,00
excl. VAT

WITH 30 ° & 45 ° TOOLHOLDER,
AND 3 CUTTING INSERTS
REF. 495000N

- Excellent for following curved shapes and forms, perfect for working on round and flat surfaces
- Variable speed for working with a variety of materials
- Complete with 30° & 45° toolholders with 3 carbide inserts
- Uses standard triangle carbide inserts
- Change of inserts quick & easy - tool-free
- Precise tool-free bevel depth adjustment
- Overload protection

Technical data	
Power input	1.200 W
Voltage	230V / 50Hz
Speed	3000 - 6000 min ⁻¹
Bevel angle	30° & 45°
Max. bevel height	6 mm
Smallest inner diameter	22 mm
Net weight	4,7 kg

Description	Reference	Price excl. VAT
Delivery in a carry case with 30° & 45° tool holder and 3 carbide inserts	495000N	599,00
Accessories (optional)	Reference	Price excl. VAT
Set of 10 triangular carbide inserts	495001	102,00



ELECTRIC BEVELER 45 / 10.6 BEVELLING AND DEBURRING MACHINE



€ 822,00
excl. VAT

**WITH 45 ° TOOL HOLDER WITH 6
CUTTING INSERTS AND
ACCESSORIES - REF. 495010**

- Excellent for following curved shapes and forms as well as for working on round and flat surfaces.
- Beveling and deburring starts at 30 mm inner diameter
- Variable speed for working with a variety of materials
- Complete with 45° toolholder with 6 carbide inserts
- Uses four sided carbide inserts
- Change of inserts quick & easy without special tools
- Bevel depth adjustment without tools, directly on the machine
- Overload protection

Technical data	
Power input	1.800 W
Voltage	230V / 50Hz
Speeds	2.300, 2.600, 3.700, 4.800, 5.800, 6.500 min ⁻¹
Bevel angle	45° (30° & 37,5° optional)
Max. bevel height 45°	10,6 mm
Smallest inner diameter	30 mm
Net weight	6,5 kg

Description	Reference	Price excl. VAT
Lieferung im Koffer mit 45° Werkzeugaufnahme, 6 Wende schneidplatten und Werkzeug	495010	822,00
Accessories (optional)	Reference	Price excl. VAT
6 Wendeschneidplatten	495011	148,00
37.5° Werkzeugaufnahme	495016	172,00
30° Werkzeugaufnahme	495015	172,00



ELECTRIC BEVELER 0/15-60/TUBE BEVELLING & DEBURRING MACHINE

€ 1320,00
excl. VAT

WITH 12 INTERCHANGEABLE
BLADES & ADAPTER FOR TUBES
Ø 150-350 mm - REF. 495020N



- High torque AC induction motor offers long life and quiet running
- Adjustable milling angle from 0° and 15° to 60°
- Maximum land width 21 mm
- Tube beveling Ø 150 - 350 mm, with optional table plate Ø 300 up to Ø 600 mm
- Delivery with 12 carbide inserts and tool holder, table plate for beveling tubes Ø 150 - 350 mm and tools
- Change of inserts quick & easy - tool-free
- Precise bevel depth adjustment

Technical data

Power input	1.100 W
Voltage	230V / 50Hz
Speeds	3.000 min ⁻¹
Beveling	60°: 18 mm, 45°: 20 mm 37,5°: 17,8 mm, 30°: 16,7 mm 15°: 15,7 mm, 0°: 21 mm
Dimensions	503 x 350 x 248 mm
Net weight	20,3 kg

Description	Reference	Price excl. VAT
Delivery in carry case with 12 carbide inserts, tool holder, table plate for tube beveling Ø 150 - 350 mm and tools	495020N	1320,00

Accessories (optional)	Reference	Price excl. VAT
Base plate for tube beveling Ø 300 up to Ø 600 mm	495040	156,00
12 carbide inserts	495030	149,00



WRAPAROUND TUBE SANDER POLISHER 760/40



€ 689,00
excl. VAT

**IN CARRY CASE WITH
ACCESSORIES REF. 495050**

Accessories included:

1. Carry case (572 x 362 x 238 mm)
2. Sandpaper belts
80 (40 x 760 mm) 1 piece each
100 (40 x 760 mm) 1 piece each
120 (20 x 760 mm) 1 piece each
3. Surface conditioning belt (40 x 760 mm)

- Applicable for rough grinding up to mirror polishing
- High efficiency motor with variable fullwave feedback
- Electronic speed control with soft start
- High stable pulleys allow precise control of abrasive belts
- Tool-free change of abrasives
- The large wraparound angle allows easy and fast preparing and finishing of tube constructions (e.g. railings)

Technical data	
Power input	1.200 W
Voltage	230V / 50Hz
No load speed	1.600 - 3.200 min ⁻¹
Surface speed	3 - 12 m/s
Max. belt length	760 mm
Max. belt width	40 mm
Net weight	3,4 kg

Description	Reference	Price excl. VAT
Delivery in hard carry case with accessories	495050	689,00



DRUM SANDER / POLISHER 100



€ 550,00
excl. VAT

**IN CARRY CASE WITH
ACCESSORIES - REF. 495080**

- Applicable for rough grinding up to mirror polishing
- High efficiency motor with full-wave feedback
- Electronic speed control
- Inflatable rubber sanding drum conforms to the surface (pump included)

Can fit:

- Sanding sleeves in various grits
- Fine sanding sponge sleeves
- Surface conditioning (fleece) sleeves



Surface conditioning flap wheel



Drive pulley for belts



Surface conditioning belts



Sandpaper belt



Surface conditioning belts



Sandpaper sleeves grit 80,100, 180 one piece each



Air pump



Inflateable rubber sanding drum



Hook & loop belt closing strap

Technical data

Power input	1.200 W
Voltage	230V / 50Hz
No load speed	1000 - 2.400 min ⁻¹
Max. wheel diameter	100 mm
Max. wheel width	100 mm
Arbor	Ø 19 mm x 100 mm mit Spindelarretierung
Net weight	4,8 kg

Description	Reference	Price excl. VAT
Delivery in hard carry case with accessories	495080	550,00



CORE DRILL HSS-CO



Drill faster and more economically
with core drills by Jepson Power!
Fully hardened HSS Co core drills*



HSS-Co
Core drill - short
> Ø 12 - 60 mm
> 30 mm cutting depth
> 19 mm Weldon shank
for drills up to Ø 60 mm



HSS-Co
Core drill - short
> Ø 61 - 130 mm
> 30 mm cutting depth
> 32 mm Weldon shank
for drills from Ø 61 mm

Ref./Ø*	Price excl. VAT	Ref./Ø*	Price excl. VAT	Ref./Ø*	Price excl. VAT	Ref./Ø*	Price excl. VAT
490212	16,71	490238	61,18	490263	169,56	490285	246,39
490213	16,99	490239	63,16	490264	172,49	490286	250,16
490214	16,99	490240	63,73	490265	175,63	490287	253,52
490215	17,56	490241	64,01	490266	178,35	490288	257,70
490216	18,41	490242	68,26	490267	181,50	490289	262,09
490217	18,97	490243	71,09	490268	186,52	490290	265,03
490218	19,82	490244	73,64	490269	189,66	490291	297,96
490219	20,11	490245	74,21	490270	193,01	490292	302,38
490220	21,52	490246	74,49	490271	197,41	490293	305,63
490221	22,66	490247	77,32	490272	201,59	490294	309,83
490222	23,22	490248	80,72	490273	204,94	490295	313,08
490223	24,64	490249	81,29	490274	207,24	490296	316,57
490224	25,20	490250	86,10	490275	212,06	490297	320,52
490225	26,34	490251	88,09	490276	215,20	490298	324,01
490226	26,90	490252	90,64	490277	219,59	490299	327,74
490227	28,32	490253	96,02	490278	223,57	4902100	332,38
490228	28,89	490254	100,55	490279	226,72	4902110	409,85
490229	30,30	490255	103,10	490280	230,28	4902120	434,50
490230	31,44	490256	105,36	490281	233,20	4902130	460,32
490231	36,82	490257	109,05	490282	236,13		
490232	39,65	490258	111,60	490283	239,91		
490233	41,07	490259	129,16	490284	242,83		
490234	47,30	490260	139,64				
490235	50,13	490261	161,61				
490236	60,04	490262	164,96				
490237	60,89						

*Ø mm last two digits

Pilot pin for core drills Ø 12 - 60 mm Weldon 19			Pilot pin for core drills Ø 61 - 130 mm Weldon 32		
Reference		Price excl. VAT	Reference		Price excl. VAT
Pilot pin 075	490200	5,23	Pilot pin 090	490201	9,34

*Co-content variable

HSS-Co
Core drill - long
> Ø 12 - 60 mm
> 55 mm cutting depth
> 19 mm Weldon shank
for drills up to Ø 60 mm



HSS-Co
Core drill - long
> Ø 61 - 130 mm
> 55 mm cutting depth
> 32 mm Weldon shank
for drill from Ø 61 mm



Ref./Ø*	Price excl. VAT	Ref./Ø*	Price excl. VAT
490512	23,50	490538	75,62
490513	24,17	490539	78,17
490514	24,99	490540	78,74
490515	25,79	490541	79,31
490516	26,61	490542	84,40
490517	27,41	490543	88,09
490518	28,91	490544	90,92
490219	30,53	490545	91,77
490520	32,01	490546	92,05
490521	33,23	490547	95,73
490522	34,57	490548	99,70
490523	35,93	490549	100,55
490524	37,55	490550	106,50
490525	42,28	490551	109,05
490526	43,76	490552	111,88
490527	45,38	490553	118,68
490528	47,68	490554	124,34
490529	50,12	490555	127,46
490530	52,41	490556	130,29
490531	54,84	490557	134,82
490532	57,14	490558	138,22
490533	59,43	490559	159,75
490534	62,67	490560	172,44
490535	64,97	490561	210,18
490536	73,92	490562	214,36
490537	75,06		

Ref./Ø*	Price excl. VAT	Ref./Ø*	Price excl. VAT
490563	220,43	490585	320,29
490564	224,20	490586	325,31
490565	228,39	490587	329,51
490566	231,95	490588	334,94
490567	235,93	490589	340,81
490568	242,41	490590	344,57
490569	246,60	490591	387,28
490570	251,00	490592	393,10
490571	256,65	490593	397,28
490572	262,09	490594	402,87
490573	266,49	490595	407,06
490574	269,42	490596	411,48
490575	275,70	490597	416,59
490576	279,68	490598	421,24
490577	285,54	490599	426,13
490578	289,52	4905100	432,18
490579	294,76	4905110	532,89
490580	299,36	4905120	564,76
490581	303,13	4905130	598,49
490582	306,89		
490583	311,92		
490584	315,68		

*Ø mm last two digits

Pilot pin for core drills Ø 12 - 60 mm Weldon 19		
	Reference	Price excl. VAT
Pilot pin 100	490500	6,43

Pilot pin for core drills Ø 61 - 130 mm Weldon 32		
	Reference	Price excl. VAT
Pilot pin 120	490501	12,17



THE GOLD FINGER THE HIGH-PERFORMANCE CORE DRILL TIN COATED

Fully hardened, TiN coated HSS core drills:

from Ø 12 mm (490212TiN) to Ø 60 mm (490260TiN) with 19 mm Weldon shaft and 30 mm cutting depth.

TiN means very high abrasion resistance and low reactivity. Therefore tool wear is significantly reduced by coating. The TiN coating enables the machining of hard steels such as ST 52 and stainless steel (in contrast to HSS-Co for conventional steels).



Reference/Ø*	Price excl. VAT
4902 12 TiN	35,30
4902 13 TiN	35,62
4902 14 TiN	36,25
4902 15 TiN	37,20
4902 16 TiN	37,52
4902 17 TiN	38,15
4902 18 TiN	38,52
4902 19 TiN	39,42
4902 20 TiN	40,69
4902 21 TiN	42,28
4902 22 TiN	43,05
4902 23 TiN	59,51
4902 24 TiN	61,41
4902 25 TiN	61,41
4902 26 TiN	60,78
4902 27 TiN	63,32
4902 28 TiN	64,59
4902 29 TiN	65,54
4902 30 TiN	66,81
4902 31 TiN	91,68
4902 32 TiN	92,63
4902 33 TiN	94,85
4902 34 TiN	102,15
4902 35 TiN	107,22

Reference/Ø*	Price excl. VAT
4902 36 TiN	110,39
4902 37 TiN	111,35
4902 38 TiN	111,98
4902 39 TiN	113,88
4902 40 TiN	115,79
4902 41 TiN	119,91
4902 42 TiN	123,40
4902 43 TiN	129,43
4902 44 TiN	130,86
4902 45 TiN	132,28
4902 46 TiN	138,31
4902 47 TiN	140,85
4902 48 TiN	142,75
4902 49 TiN	145,29
4902 50 TiN	148,46
4902 51 TiN	154,81
4902 52 TiN	159,88
4902 53 TiN	173,53
4902 54 TiN	175,43
4902 55 TiN	185,26
4902 56 TiN	185,26
4902 57 TiN	187,80
4902 58 TiN	191,61
4902 59 TiN	194,78
4902 60 TiN	195,73

*Ø mm last two digits

490145TiN

Set Ø 12, 14, 16,
18, 20, 22 mm +
pilot pin



CORE DRILL SETS

MADE
IN
GERMANY



The GOLD FINGER The high-performance core drill TiN coated Ref. 490145TiN

- Ø 12, 14, 16, 18, 20, 22 mm
+ pilot pin
- Cutting depth: 30 mm
- 19 mm Weldon shank
- High abrasion resistance and
low reactivity
- Increased tool life

€ 228,00
excl. VAT

REF. 490145TiN



HSS-Co core drill set Ref. 490145

- Ø 12, 14, 16, 18, 20, 22 mm
+ pilot pin
- Cutting depth: 30 mm
- Weldon shank 19 mm
- Full-grinding technology
- Increased tool life
- Improved chip flow

€ 114,00
excl. VAT

REF. 490145



Carbide tipped core drill set Ref. 490148

- Ø 12, 14, 16, 18, 20, 22 mm
+ pilot pin
- Cutting depth: 35 mm
- Weldon shank 19 mm
- Core drilling in stainless steel
- Increased tool life
- Improved chip flow

€ 207,00
excl. VAT

REF. 490148



Twist drill set HSS Ref. 490400SET

- Ø 6, 7, 8, 9, 10, 11 mm
- Cutting depth: 30 mm
- Weldon shank 19 mm
- Drilling in confined spaces

€ 159,00
excl. VAT

REF. 490400SET



MAGPRO TP 2000 3 IN 1 AUTO REVERSE

**PRIME
LINE**



€ 1752,00
excl. VAT

**IN CARRY CASE WITH
UNIVERSAL ADAPTER FOR TAPS
M5 UP TO M22
REF. 490190N**

Technical data

Power input	1.100 W
Voltage	230V / 50Hz
Core drilling speed	550/330 min ⁻¹ (no load/full load)
Twist drilling speed	550/330 min ⁻¹ (no load/full load)
Tapping speed	150/90 min ⁻¹ (no load/full load)
Shank for taps	Universal adapter M5 bis M22
Shank	19 mm Weldon
Max. Ø core drills x L	35 x 110 mm
Max. Ø twist drills x L	13 x 110 mm
Stroke	150 mm
Magnetic adhesion	15.000 N
Magnetic surface	165 x 80 mm
Cooling system	integrated, automatic
Net weight	13,7 kg

Description	Reference	Price excl. VAT
Magpro TP 2000 - delivery in carry case with adapter, universal adapter for taps M5 up to M22 (DIN, JIS, ISO), quick release for core drills and twist drills, safety chain and tools	490190N	1752,00

Optional accessories	Reference	Price excl. VAT
Quick change inserts M5 -M22 (single)	490165M	56,00
HSS-Co core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145	114,00
Carbide tipped core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490148	207,00
„Gold finger“ core drill set TiN-coated 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145TiN	228,00
Magnetic chip collector	490153	49,90
High performance cutting oil spray for optimal cooling and higher cutting performance (400 ml)	490020	16,00




MAGPRO 35 KOMPAKT

**PRIME
LINE**

€ 795,00

excl. VAT

**IN CARRY CASE WITH
UNIVERSALADAPTER FOR TAPS
M5 UP TO M22
REF. 490190N**

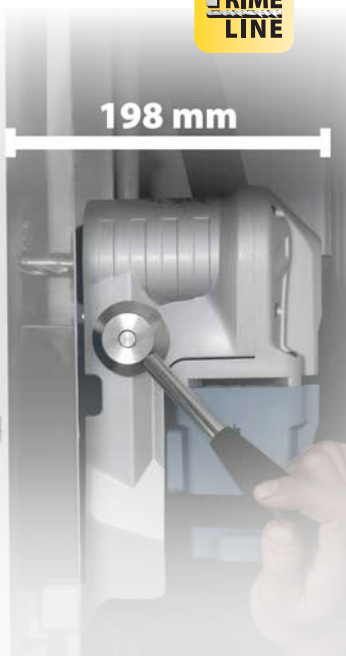

Technical data		
Power input	1.100 W	
Voltage	230V / 50Hz	
No load / full load speed	650/390 min ⁻¹	
Capacity Ø x depth	35 mm x 30 mm	
Shank	19 mm Weldon	
Magnetic adhesion	15.000 N	
Magnetic surface	165 x 80 mm	
Dimensions	285 x 101 x 198	
Net weight	10 kg	
Description	Reference	Price excl. VAT
Magpro 35 kompakt - delivery in a carry case quick release chuck, lashing strap and tools	490050	795,00
Optional accessories	Reference	Price excl. VAT
HSS-Co core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145	114,00
Carbide tipped core drill 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490148	207,00
„Gold finger“ core drill set TiN-coated 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145TiN	228,00
Twist drill set 6-11 mm Weldon 19 mm	490400Set	159,00
Magnetic chip collector	490153	49,90
High performance cutting oil spray for optimal cooling and higher cutting performance (400 ml)	490020	16,00



MAGPRO 35 STANDARD



€ 757,00
excl. VAT

IN CARRY CASE WITH SAFETY
CHAIN & MAINTENANCE TOOLS
REF. 490150

Technical data

Power input	1.100 W
Voltage	230V / 50Hz
No load / full load speed	620/350 min ⁻¹
Shank	19 mm Weldon
Max. Ø core drills x L	12 - 35 x 50 mm
Max. Ø twist drills x L	13 x 110 mm
Stroke	80 mm
Magnetic adhesion	15.000 N
Magnetic surface	165 x 80 mm
Cooling system	integrated, automatic
Net weight	12 kg

Description	Reference	Price excl. VAT
Magpro 35 - 230V delivery in carry case with safety chain and maintenance tools	490150	757,00
Magpro 35 - same as above but with 115V	490110	757,00

Accessories (optional)	Reference	Price excl. VAT
HSS-Co core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 mm + pilot pin	490145	114,00
Carbide tipped core drill 30 mm Ø 12, 14, 16, 18, 20, 22 mm + pilot pin	490148	207,00
„Gold finger“ core drill TiN-coated 30 mm Ø 12, 14, 16, 18, 20, 22 mm + pilot pin	490145TiN	228,00
Drill chuck and adapter 13 mm	490152	42,00
Quick release for Magpro 35	490151	113,00
Magnetic chip collector	490153	49,90
High performance cutting oil spray for optimal cooling and higher cutting performance (400 ml)	490020	16,00



MAGPRO 35 ADJUST 1S/2S



€ 770,00
excl. VAT

**MAGPRO 35 ADJUST 1S
WITH 1 SPEED
REF. 490150 1**

€ 989,00
excl. VAT

**MAGPRO 35 ADJUST 2S
WITH 2 SPEEDS
REF. 490150 2**

Technical data

Power input	1.100 W
Voltage	230V / 50Hz
Speed Magpro 35 Adjust 1s	450/270 min ⁻¹
Speed Magpro 35 Adjust 2s	450/270 min ⁻¹ , 730/440 min ⁻¹
Shank	19 mm Weldon
Max. Ø core drills x L	12 - 35 x 110 mm
Max. Ø twist drills x L	13 x 140 mm
Stroke	85 - 230 mm
Magnetic adhesion	17.000 N
Magnetic surface	175 x 90 mm
Cooling system	integrated, automatic
Net weight	14 kg (Magpro 35/1S) 15 kg (Magpro 35/2S)

Description	Reference	Price excl. VAT
Magpro 35 Adjust 1s - delivery in carry case with quick release, lashing strap and tools	490150 1	770,00
Magpro 35 Adjust 1s - delivery in carry case with quick release, lashing strap and tools + drill chuck and adapter 13 mm	490150 1A	812,00
Magpro 35 Adjust 2s - delivery in carry case with quick release, lashing strap and tools	490150 2	989,00
Accessories (optional)	Reference	Price excl. VAT
HSS-Co core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 mm + pilot pin	490145	114,00
Carbide tipped core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 mm + pilot pin	490148	207,00
„Gold finger“ Core drill set TiN-coated 30 mm Ø 12, 14, 16, 18, 20, 22 mm + pilot pin	490145TiN	228,00
Drill chuck and adapter 13 mm	490152A	42,00
Adapter with Weldon 19 mm for Fein core drills with quick-in shank including + pilot pin	490154	81,00
Magnetic chip collector	490153	49,90



€ 770,00
excl. VAT

**IN CARRY CASE WITH SAFETY
CHAIN, MAINTENANCE
EQUIPMENT
REF. 491140K**

MAGPRO 40/1S

- Very compact and lightweight design - only 12 kg
- Core drilling up to Ø 40 mm.
- Quick release Weldon 19 mm shank
- Crank lever and cooling system can be installed on both sides

Technical data	
Power input	1.100 W
Voltage	230 V / 50 Hz
No load speed	625 min ⁻¹
Shank	19 mm Weldon
Core drill max. Ø x L	12 - 40 x 110 mm
Twist drill max. Ø x L	13 x 140 mm
Stroke	85 mm / 200 mm
Magnetic adhesion	10.500 N
Magnetic surface	158 x 76 mm
Cooling system	integrated, automatic
Net weight	12 kg



MAGPRO 40/1S ADJUST SWIVEL

**PRIME
LINE**



€ 789,00
excl. VAT

**IN CARRY CASE WITH SAFETY
CHAIN, MAINTENANCE
EQUIPMENT
REF. 490140S**



**Crank lever and cooling system
can be installed on both sides**



**Swivel base plate: 2 x 15°
Slidable base plate: 15 mm**

Technical data

Power input	1.100 W
Voltage	230V / 50Hz
No load speed	625 min ⁻¹
Shank	19 mm Weldon
Core drill max. Ø x L	12 - 40 x 110 mm
Twist drill max. Ø x L	13 x 140 mm
Stroke	85 mm/200 mm
Magnetic adhesion	10.500 N
Magnetic surface	158 x 76 mm
Cooling system	integrated, automatic
Net weight	12 kg

Description	Reference	Price excl. VAT
Magpro 40/1s Adjust Swivel - delivery in a carry case with safety chain, maintenance equipment and coolant tank, chip protection	490140S	789,00

Accessories (optional)	Reference	Price excl. VAT
HSS-Co core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145	114,00
Carbide tipped core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490148	207,00
„Gold finger“ core drill set TiN-coated 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145TiN	228,00
Drill chuck and adapter 13 mm	490152A	42,00
Magnetic chip collector	490153	49,90
High-performance drilling and cutting oil spray for optimal cooling and higher cutting performance (Content: 400 ml)	490020	16,00



MAGPRO 50/2S ADJUST

€ 995,00

excl. VAT

DELIVERY IN A CARRY CASE
WITH SAFETY CHAIN & TOOLS
REF. 490170 2



Technical data

Power input	1.100 W
Voltage	230V / 50Hz
No load / full load speeds	300/180 min ⁻¹ 400/170 min ⁻¹
Shank	19 mm Weldon
Core drill max. Ø x L	12 - 50 x 110 mm
Twist drill max. Ø x L	13 x 140 mm
Stroke	85 - 230 mm
Magnetic adhesion	17.000 N
Magnetic surface	175 x 90 mm
Cooling system	integrated, automatic
Net weight	15,0 kg

Description	Reference	Price excl. VAT
Magpro 50 / 2s Adjust - delivery in a carry case with quick-release chuck, safety chain and tools	490170 2	995,00

Accessories (optional)	Reference	Price excl. VAT
HSS-Co core drill set 30 mm Ø Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145	114,00
Carbide tipped core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490148	207,00
„Gold finger“ core drill set TiN-coated 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145TiN	228,00
Drill chuck and adapter 13 mm	490152A	42,00
Adapter Weldon 19 mm for Fein core drills with Quick-in holder + pilot pin / centering pin	490154	81,00
Magnetic chip collector	490153	49,90
High-performance drilling and cutting oil spray for optimal cooling and higher cutting performance (Content: 400 ml)	490020	16,00



MAGPRO 50/2S



€ 1295,00
excl. VAT

**DELIVERY IN A CARRY CASE
WITH SAFETY CHAIN & TOOLS
REF. 490170**

Technical data

Power input	1.800 W
Voltage	230V / 50Hz
No load / full load speeds	380/230 min ⁻¹ 500/300 min ⁻¹
Shank	19 mm Weldon, M24
Core drill max. Ø x L	12 - 50 x 70 mm
Twist drill max. Ø x L	16 x 110 mm
Max. drilling depth x Ø	75 x 50 mm
Stroke	100 mm
Magnetic adhesion	32.000 N
Magnetic surface	200 x 100 mm
Cooling system	integrated, automatic
Net weight	22,9 kg

Description	Reference	Price excl. VAT
Magpro 50 / 2s - 230V delivery in a carry case with safety chain and tools	490170	1295,00

Accessories (optional)	Reference	Price excl. VAT
HSS-Co core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145	114,00
Carbide tipped core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490148	207,00
„Gold finger“ core drill set TiN-coated 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145TiN	228,00
Drill chuck and adapter 16 mm	490173	104,00
Quick release for Magpro 50/2s	490172	51,00
Magnetic chip collector	490153	49,90
High-performance drilling and cutting oil spray for optimal cooling and higher cutting performance (Content: 400 ml)	490020	16,00



MAGPRO 60/2S

**PRIME
LINE**



€ 1195,00
excl. VAT

**IN CARRY CASE WITH SHANK,
SAFETY CHAIN, CARABINER
& HEX KEY REF. 491170N**

Technical data	
Power input	1.550 W
Voltage	230V / 50Hz
No load / full load speeds	1: 250/135 min ⁻¹ 2: 605/330 min ⁻¹
Shank	MT2
Core drill Ø x L	60 mm
Max. Ø twist drills x L	16 x 110 mm
Max. Ø twist drills x L MT2	23 x 150 mm
Stroke	190 mm
Magnetic adhesion	15.300N
Net weight	17 kg
Dimensions [mm]	430 (620) x 200 x 260

Description	Reference	Price excl. VAT
Magpro 60/2S - 230V delivery in carry case with shank, safety chain, carabiner and hex key	491170N	1195,00
Accessories (optional)	Reference	Price excl. VAT
HSS-Co core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145	114,00
Carbide tipped core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490148	207,00
„Gold finger“ core drill set TiN-coated 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145TiN	228,00
HSS-Co core drill set 30 mm Ø $\frac{9}{16}$ “, $\frac{5}{8}$ “, $\frac{11}{16}$ “, $\frac{3}{4}$ “, $\frac{13}{16}$ “, $\frac{15}{16}$ “ + pilot pin	490145IN	114,00
Magnetic chip collector	490153	49,90
High-performance drilling and cutting oil spray for optimal cooling and higher cutting performance (Content: 400 ml)	490020	16,00



MAGPRO 60M20

Core drilling up to Ø 60 mm
Twist drilling up to Ø 23 mm
Thread cutting up to M20

- 6-speed motor
- Improved magnetic adhesion
- Quick and easy conversion to twist drilling thanks to the MT2 arbor

€ 1325,00
excl. VAT

**IN CARRY CASE WITH SHANK,
SAFETY CHAIN, CARABINER
& HEX KEY REF. 491170M20**

Technical data	
Power input	1.550 W
Voltage	230 V / 50 Hz
No load speeds	140 / 190 / 240 / 330 / 445 / 565 min ⁻¹
Shank	MT2
Core drill max. Ø x L	60 mm
Max. Ø twist drills x L	16 x 110 mm
Max. Ø twist drills x L MT2	23 x 150 mm
Max. thread cutting	M5 - M20
Stroke	190 mm
Magnet on 1" plate (dead lift)	15.300N
Net weight	17 kg
Dimensions [mm]	430 (620) x 200 x 260



MAGPRO 75/4S MAGPRO 75/4S SWIVEL BASE

**PRIME
LINE**



€ 1495,00
excl. VAT

WITH SAFETY CHAIN, TOOLS
& MT3/19 MM ADAPTER
REF. 490160

€ 1630,00
excl. VAT

WITH SAFETY CHAIN, TOOL
& MT3/19 MM ADAPTER
REF. 490160S

Technical data

Power input	1.800 W
Voltage	230V / 50Hz
No load/full load speeds	1: 210/120 min ⁻¹ 2: 270/160 min ⁻¹ 3: 410/290 min ⁻¹ 4: 530/310 min ⁻¹
Shank	19/32 mm Weldon, MT3
Max. Ø core drills x L	12 - 75 x 75 mm
Max. Ø twist drills x L	16 x 110 mm
Max. Ø twist drills x L MT3	32 x 150 mm
Stroke	100 mm
Magnetic adhesion	32.000 N
Magnetic surface	200 x 100 mm
Cooling system	integrated, automatic
Net weight	24,8 kg (MP75), 27 kg (MP75 Swivel base)

Description	Reference	Price excl. VAT
Magpro 75/4s - 230V - delivery in carry case with safety chain, tools and MT3/19 mm adapter	490160	1495,00
Magpro 75/4s swivel base - 230V - delivery in a carry case with safety chain, tool and MT3/19 mm adapter	490160S	1630,00

Accessories (optional)	Reference	Price excl. VAT
MT3 quick change adapter set for thread cutter shank	490162	125,00
Quick change insert M3-M14 (single)	490162 M3-14	56,00
MT3 quick change adapter set for thread cutter shank M5-M22	490165	204,00
Quick change insert M5-M22 (single)	490165 M5-22	56,00
Weldon 32/MT3 adapter for magnetic drills from Ø 61 mm	490163	99,00
Drill chuck and adapter 16 mm	490164	104,00
Magnetic chip collector	490153	49,90

**PRIME
LINE****MAGPRO 80/4S****€ 1237,00**
excl. VAT**IN CARRY CASE WITH QUICK
RELEASE, LASHING STRAP & TOOLS
REF. 490184****Technical data**

Power input	1.600 W
Voltage	230V / 50Hz
No load / full load speeds	1: 190/105 min ⁻¹ 2: 300/165 min ⁻¹ 3: 420/230 min ⁻¹ 4: 660/365 min ⁻¹
Shank	19/32 mm Weldon, MT3
Core drill Ø x L	12 - 80 mm x 110 mm
Max. Ø twist drills x L	16 x 110 mm
Max. Ø twist drills x L x MT3	32 x 150 mm
Stroke	85 mm for normal core drills, up to 270 mm for twist drills (with adapter & chuck)
Magnetic adhesion	17.000N
Magnetic surface	220 x 110 mm
Cooling system	integrated, automatic
Net weight	24 kg

Description	Reference	Price excl. VAT
Magpro 80 4S - delivery in carry case with quick release, lashing strap and tools	490184	1237,00
Accessories (optional)	Reference	Price excl. VAT
Drill chuck 16 mm + MT3 adapter	490164	104,00
Weldon 32 MT3 adapter for core drills from Ø 61 mm	490163	99,00
Adapter with Weldon 19 mm for Fein core drills with Quick-in shank including 1 ejector pin	490154	81,00
Magnetic chip collector	490153	49,90
High performance cutting oil spray for optimal cooling and higher cutting performance (400 ml)	490020	16,00



MAGPRO 100/M30

**PRIME
LINE**

€ 1869,00

excl. VAT

**IN CARRY CASE WITH SAFETY
CHAIN AND TOOLS
REF. 491100N**



Technical data

Power input	1.880 W
Voltage	230V / 50Hz
No load speeds [min ⁻¹]	70 / 90 / 145 / 185 / 245 / 305 / 475 / 605
Max Ø thread cutter	M4-M30
Core drill Ø x L	100 mm
Max. Ø twist drills x L MT3	32 x 150 mm
Stroke	260 mm
Magnetic adhesion	17.600N
Net weight	26 kg
Dimensions [mm]	530 (790) x 205 x 300

Description	Reference	Price excl. VAT
Magpro 100 M30 - 230V delivery in carry case with shank, safety chain, carabiner and hex key	491100N	1869,00
Accessories (optional)	Reference	Price excl. VAT
HSS-Co core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145	114,00
Carbide tipped core drill set 30 mm Ø 12, 14, 16, 18, 20, 22 + pilot pin	490148	207,00
„Gold finger“ core drill set TiN-coated Ø 12, 14, 16, 18, 20, 22 + pilot pin	490145TiN	228,00
HSS-Co core drill set 30 mm Ø 9/16", 5/8", 11/16", 3/4", 13/16", 15/16" + pilot pin	490145IN	114,00
Magnetic chip collector	490153	49,90
High-performance drilling and cutting oil spray for optimal cooling and higher cutting performance (Content: 400 ml)	490020	16,00



MAGPRO 150/M42

**PRIME
LINE**

€ 3998,00

excl. VAT

**IN CARRY CASE WITH SAFETY
CHAIN AND TOOLS
REF. 491150N**



Technical data

Power input	2.400 W
Voltage	230 V / 50 Hz
No load speeds [min ⁻¹]	60 / 80 / 125 / 165 / 205 / 275 / 410 / 545
Shank	19/32 mm Weldon, MT4
Max. tapping capacity	M5 - M42
Max. Ø core drills	150 mm
Max. Ø twist drills (MT4)	46 mm
Magnetic adhesion	20.500 N
Dimensions [mm]	630 (930) x 210 x 390
Stroke	300 mm
Net weight	42 kg

Description	Reference	Price excl. VAT
Magpro 150 M42 - in case with MT4 Weldon 32 adapter, safety chain, carabina and hexagon key	491150N	3998,00

Accessories (optional)	Reference
MT4 / Weldon 19 mm adapter (included)	490167MK4
MT4 / Weldon 32 mm adapter (included)	490163MK4
MT4 quick change adapter for thread cutter M5-M22	491151
Quick change insert M5-M22 (single)	490165 M5-22
MT4 quick change adapter for thread cutter M14-M30	491152
Quick change insert M14-M30 (single)	490169 M14-30
MT4 quick change adapter for thread cutter M20-M42	491153
Quick change insert M20-M42 (single)	491153 M20-42



MAGPRO 200M52

Core drilling up to Ø 200 mm
Thread cutting up to M52
Twist drilling up to Ø 56 mm

**COMING
SOON**

- Heavy duty reversible motor unit
- 4 Gears, 8 Speeds
- MT5 arbor
- Highest stability without extra support
- Overload protection

Technical specifications	
Power input	2.850 W
Voltage	230 V / 50 Hz
No load speeds [min ⁻¹]	50 / 70 / 100 / 135 / 215 / 290 / 420 / 555
Shank	32 mm Weldon, MT5
Max. tapping capacity	M5 - M52
Max. Ø core drills	200 mm
Max. Ø twist drills (MT5)	56 mm
Magnetic adhesion	26.800 N
Dimensions [mm]	730 (955) x 280 x 455
Stroke	330 mm
Net weight	52 kg



TRAINING AND CONSULTING

You have the task, we have the tools!

We offer specialized solutions for cutting and drilling in steel and stainless steel and like to share detailed information about our products as much as we can.

Feel free to contact us for product training via video conference to get to know our products better.




Face-to-face consulting

At demodays, technical training days and tradeshows we like sharing our innovative cutting technology with you to offer you the best possible solution for your cutting problems.

Fairs and trade shows

We participate at tradeshows and specialized events. Connecting face-to-face with our customers is an essential part of our business.



Live product demonstrations

We reach out to our customers to perform demonstrations on the construction site. This way we get the best results finding a solution for your problems.



MAGPRO 40/2S

€ 799,00

excl. VAT

**IN CARRY CASE WITH
LASHING STRAP, SERVICE
EQUIPMENT & COOLANT TANK
REF. 490142**



Technical data

Power input	1.100 W
Voltage	230V / 50Hz
No load/full load speeds	core drilling 650 / 465 min ⁻¹ twist drilling 1100 / 790 min ⁻¹
Shank	19 mm Weldon
Core drill max. Ø x L	12 - 40 x 110 mm
Max. twist drilling depth x Ø	13 x 140 mm
Stroke	85 mm for normal core drills, up to 165 mm for twist drill
Magnetic adhesion	17.000 N
Magnetic surface	170 x 85 mm
Cooling system	integrated, automatic
Net weight	13 kg

Description	Reference	Price excl. VAT
Magpro 40/2s delivery in a carry case with lashing strap, service equipment and coolant tank	490142	799,00

Accessories (optional)	Reference	Price excl. VAT
Drill chuck and adapter 13 mm	490152A	42,00
Weldon adapter 19 mm for Fein core drills with quick-in shank and + pilot pin / centering pin	490154	81,00
Magnetic chip collector	490153	49,90
High-performance drilling and cutting oil spray for optimal cooling and higher cutting performance (Content: 400 ml)	490020	16,00